


# ECOEXI 24m NRG BUS WL/CL 3H Exit Sign Luminaire

Part No. L20001

Categories: Exit Signs, NRG BUS


Tag: ECOEXI WL/CL

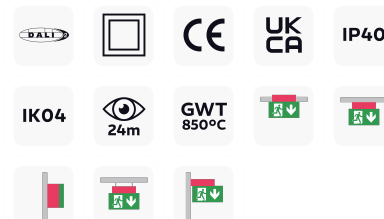

Exit sign luminaire with quick connection and easy installation.

## TECHNICAL SPECIFICATION

Weight	1 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG BUS DALI 2
Insulation class	II
Compliance	CE, UKCA
IP rating	IP40
IK rating	IK04
Viewing distance	24 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Surface ceiling, Surface wall, Suspended ceiling, Wall bracket
Emergency duration (h)	3
Battery	LiFePO4 3.2 V 3.2 Ah
Power consumption AC (W)	Max. 4
Charging times (h)	24
Mode of operation	Maintained, Non-maintained
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ABS
Operating temperature (°C)	0 to +40

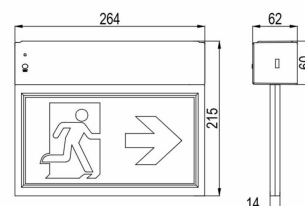

## PRODUCT ACCESSORIES



LA18041  
ECOEXI Recessed Frame  
24m SC



LA18038  
ECOEXI Wall Bracket  
24m