


# ECOEXI 30m NRG SP Exit Sign Luminaire

Part No. L18122

Categories: NRG Exit Signs, NRG Exit Signs, NRG+ CPS, NRG+ LPS

Tag: ECOEXI SP

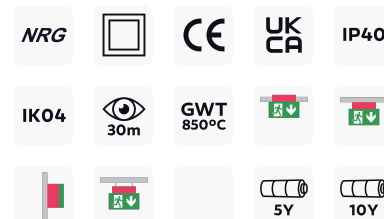

Exit sign luminaire with quick connection and easy installation.

## TECHNICAL SPECIFICATION

Weight	1.26 kg
System	NRG
Insulation class	II
Compliance	CE, UKCA
IP rating	IP40
IK rating	IK04
Viewing distance	30 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Surface ceiling, Surface wall, Suspended ceiling, Wall bracket
Warranty	5 Years, 10 Years
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Power consumption AC (VA)	7.5
Power consumption DC (mA / W)	16 / 3.6
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ABS
Operating temperature (°C)	-10 to +40



## PRODUCT ACCESSORIES



LA18039  
ECOEXI Recessed Frame  
30m



LA18040  
ECOEXI Wall Bracket  
30m