


ECOEXI 30m NRG WL/CL Exit Sign Luminaire

Part No. L18120

Categories: NRG Exit Signs, NRG Exit Signs, NRG+ CPS, NRG+ LPS

Tag: ECOEXI WL/CL


exilux

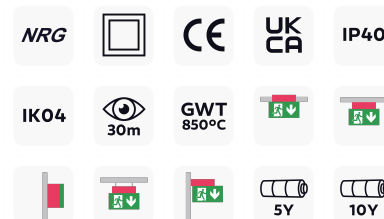

Exit sign luminaire with quick connection and easy installation.

TECHNICAL SPECIFICATION

Weight	1.2 kg
System	NRG
Insulation class	II
Compliance	CE, UKCA
IP rating	IP40
IK rating	IK04
Viewing distance	30 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Surface ceiling, Surface wall, Suspended ceiling, Wall bracket
Warranty	5 Years, 10 Years
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Power consumption AC (VA)	7.5
Power consumption DC (mA / W)	16 / 3.6
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ABS
Operating temperature (°C)	-10 to +40

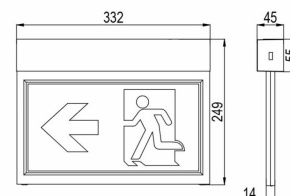

PRODUCT ACCESSORIES



LA18039
ECOEXI Recessed Frame
30m



LA18040
ECOEXI Wall Bracket
30m