


ECOEXI 30m NRG ZB WL/CL 3H Exit Sign Luminaire

Part No. L21003

Categories: Exit Signs, NRG ZB Wireless


Tag: ECOEXI WL/CL

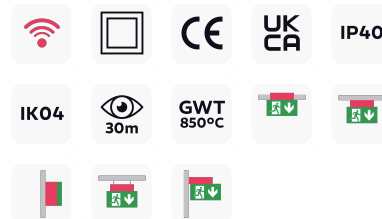

Exit sign luminaire with quick connection and easy installation.

TECHNICAL SPECIFICATION

Weight	1.1 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG ZB Wireless
Insulation class	II
Compliance	CE, UKCA
IP rating	IP40
IK rating	IK04
Viewing distance	30 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Surface ceiling, Surface wall, Suspended ceiling, Wall bracket
Emergency duration (h)	3
Battery	LiFePO4 3.2 V 3.2 Ah
Power consumption AC (W)	Max. 4
Charging times (h)	24
Mode of operation	Maintained, Non-maintained
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ABS
Operating temperature (°C)	0 to +40

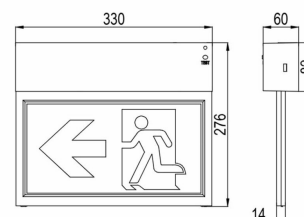

PRODUCT ACCESSORIES



LA18042
ECOEXI Recessed Frame
30m SC



LA18040
ECOEXI Wall Bracket
30m