


EVOLUX 24m NRG 2W WL/CL Exit Sign and Safety Luminaire



Part No. L18141

Categories: NRG Exit Signs, NRG Exit Signs, NRG+ CPS, NRG+ LPS


Tag: EVOLUX 24M WL/CL

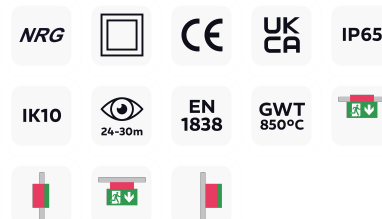

Exit sign or safety luminaire with an IP65 rating, suitable for mounting on walls, ceilings and recessed.

TECHNICAL SPECIFICATION

Weight	0.52 kg
System	NRG
Insulation class	II
Compliance	CE, UKCA
IP rating	IP65
IK rating	IK10
Viewing distance	24 m – 30 m
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Nominal flux (lm)	320
Polar curve image	YES
Power consumption AC (VA)	5.5
Power consumption DC (mA / W)	11 / 2.5
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9003
Material	PC
Operating temperature (°C)	-10 to +40

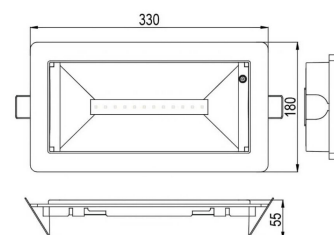

PRODUCT ACCESSORIES



LA18044
EVOLUX 30m Flag
Pictogram Set



LA18047
EVOLUX Full Recessed
Set (included in delivery)



LA18046
EVOLUX Semi-Recessed
Set

