


EVOLUX 24m NRG+ 2W WL/CL Exit Sign and Safety Luminaire



Part No. L18142

Categories: NRG+ CPS, NRG+ Exit Signs, NRG+ Exit Signs, NRG+ LPS


Tag: EVOLUX 24M WL/CL

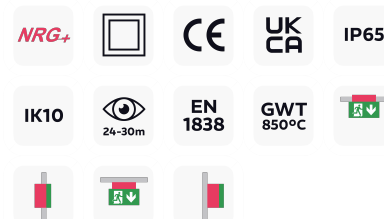

Exit sign or safety luminaire with an IP65 rating, suitable for mounting on walls, ceilings and recessed.

TECHNICAL SPECIFICATION

Weight	0.52 kg
System	NRG+
Insulation class	II
Compliance	CE, UKCA
IP rating	IP65
IK rating	IK10
Viewing distance	24 m – 30 m
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Polar curve image	YES
Power consumption DC (mA / W)	11 / 2.5
Power consumption AC (VA)	5.5
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Nominal flux (lm)	320
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9003
Material	PC
Operating temperature (°C)	-10 to +40

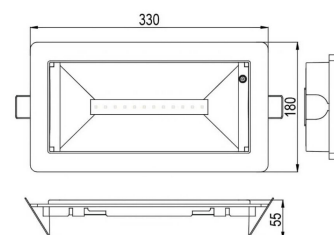

PRODUCT ACCESSORIES



LA18044
EVOLUX 30m Flag
Pictogram Set



LA18047
EVOLUX Full Recessed
Set (included in delivery)



LA18046
EVOLUX Semi-Recessed
Set

