

# EVOLUX 24m NRG ZB 2W WL/CL 3H


## Exit Sign and Safety Luminaire



Part No. L21014

Categories: Exit Signs, Luminaires, NRG ZB Wireless


Tag: EVOLUX 24M WL/CL

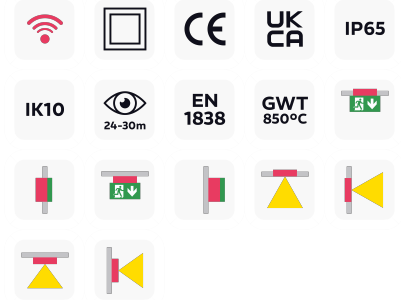

Exit sign or safety luminaire with an IP65 rating, suitable for mounting on walls, ceilings and recessed.

### TECHNICAL SPECIFICATION

Weight	0.8 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG ZB Wireless
Insulation class	II
Compliance	CE, UKCA
IP rating	IP65
IK rating	IK10
Viewing distance	24 m – 30 m
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Mounting luminaire	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Emergency duration (h)	3
Battery	LiFePO4 3.2 V 4.5 Ah
Nominal flux (lm)	200
Polar curve image	YES
Power consumption AC (W)	Max. 4
Charging times (h)	24
Mode of operation	Maintained, Non-maintained
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9003
Material	PC
Operating temperature (°C)	0 to +45

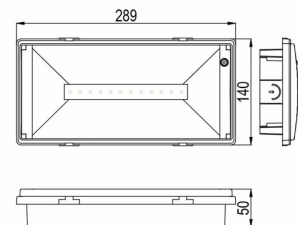

## PRODUCT ACCESSORIES



LA18044  
EVOLUX 30m Flag  
Pictogram Set



LA18047  
EVOLUX Full Recessed  
Set (included in delivery)



LA18046  
EVOLUX Semi-Recessed  
Set

