


EVOLUX NRG ZB 4W WL/CL 3H Exit Sign or Safety Luminaire



Part No. L21015

Categories: Luminaires, NRG ZB Wireless



Tag: EVOLUX 4W WL/CL

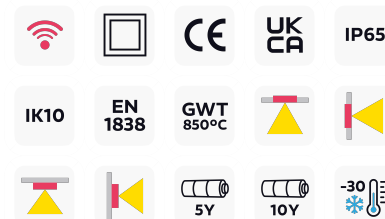

Exit sign or safety luminaire with an IP65 rating, suitable for mounting on walls, ceilings and recessed.

TECHNICAL SPECIFICATION

Weight	0.8 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG ZB Wireless
Insulation class	II
Compliance	CE, UKCA
IP rating	IP65
IK rating	IK10
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting luminaire	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Warranty	5 Years, 10 Years
Environments	Cold
Battery	LiFePO4 6.4 V 3.2 Ah
Emergency duration (h)	3
Nominal flux (lm)	500
Polar curve image	YES
Power consumption AC (W)	Max. 4
Charging times (h)	24
Mode of operation	Non-maintained
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9003
Material	PC
Operating temperature (°C)	0 to +45

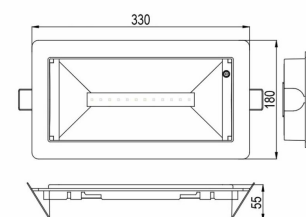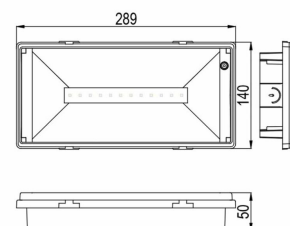

PRODUCT ACCESSORIES



LA18047
EVOLUX Full Recessed
Set (included in delivery)



LA18046
EVOLUX Semi-Recessed
Set

