


# EXIGUIDE 24m NRG+ WL/CL Exit Sign Luminaire



Part No. L18131

Categories: NRG+ CPS, NRG+ Exit Signs, NRG+ Exit Signs, NRG+ LPS

Tag: EXIGUIDE WL/CL

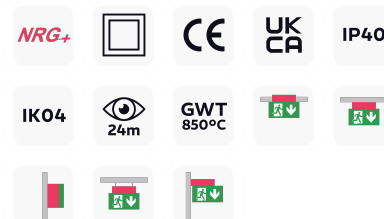

Exit sign luminaire with a modern design and simple shape.

## TECHNICAL SPECIFICATION

Weight	0.41 kg
System	NRG+
Insulation class	II
Compliance	CE, UKCA
IP rating	IP40
IK rating	IK04
Viewing distance	24 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Surface ceiling, Surface wall, Suspended ceiling, Wall bracket
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Power consumption AC (VA)	4
Power consumption DC (mA / W)	09-Feb
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ABS
Operating temperature (°C)	-10 to +40

