


# MULTYLUX 24m NRG+ WL/CL Exit Sign Luminaire

Part No. L18150

Categories: NRG+ CPS, NRG+ Exit Signs, NRG+ Exit Signs, NRG+ LPS



Tag: MULTYLUX WL/CL

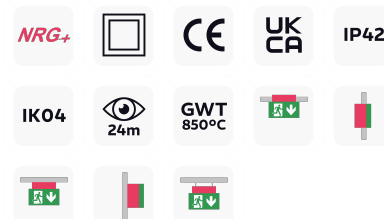

Exit sign luminaire suitable for mounting on walls, ceilings and recessed.

## TECHNICAL SPECIFICATION

Weight	0.85 kg
System	NRG+
Insulation class	II
Compliance	CE, UKCA
IP rating	IP42
IK rating	IK04
Viewing distance	24 m
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall, Suspended ceiling
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Power consumption AC (VA)	7
Power consumption DC (mA / W)	15 / 3.3
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ALUMINIUM – PC
Operating temperature (°C)	-10 to +40

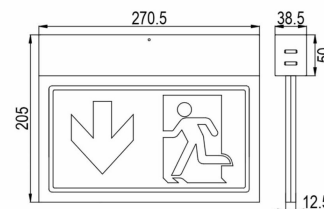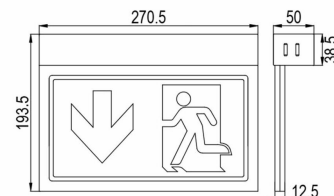

## PRODUCT ACCESSORIES



LA18051  
MULTYLUX Recessed  
Frame



LA18052  
MULTYLUX Wiring  
Suspension 0.5m Set



LA18053  
MULTYLUX Wiring  
Suspension 1m Set