


# MULTYLUX C 24m NRG ZB WL/CL 3H

## Exit Sign and Safety Luminaire

Part No. L21023

Categories: Exit Signs, Luminaires, NRG ZB Wireless

Tag: MULTYLUX WL/CL

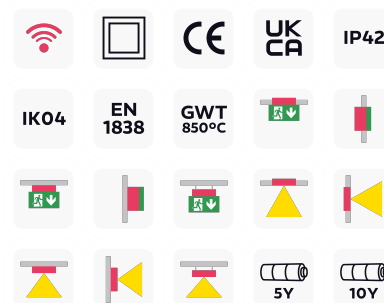

Exit sign and safety luminaire combined, with downlight element to illuminate in accordance with the EN 1838 requirement for 5 lx illuminance on safety devices, suitable for mounting on walls, ceilings and recessed.

### TECHNICAL SPECIFICATION

Weight	1 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG ZB Wireless
Insulation class	II
Compliance	CE, UKCA
IP rating	IP42
IK rating	IK04
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall, Suspended ceiling
Mounting luminaire	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall, Suspended ceiling
Warranty	5 Years, 10 Years
Emergency duration (h)	3
Battery	LiFePO4 3.2 V 4.5 Ah
Nominal flux (lm)	100
Polar curve image	YES
Power consumption AC (W)	Max. 7
Charging times (h)	24
Mode of operation	Maintained, Non-maintained
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ALUMINIUM – PC
Operating temperature (°C)	0 to +45



## PRODUCT ACCESSORIES



LA18051  
MULTYLUX Recessed  
Frame



LA18052  
MULTYLUX Wiring  
Suspension 0.5m Set



LA18053  
MULTYLUX Wiring  
Suspension 1m Set

