


# MULTYLUX C 32m NRG+ WL/CL Exit Sign and Safety Luminaire

Part No. L18156

Categories: NRG+ CPS, NRG+ Exit Signs, NRG+ Exit Signs, NRG+ LPS

Tag: MULTYLUX WL/CL

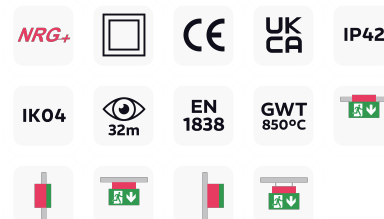

Exit sign and safety luminaire combined, with downlight element to illuminate in accordance with the EN 1838 requirement for 5 lx illuminance on safety devices, suitable for mounting on walls, ceilings and recessed.

## TECHNICAL SPECIFICATION

Weight	1.15 kg
System	NRG+
Insulation class	II
Compliance	CE, UKCA
IP rating	IP42
IK rating	IK04
Viewing distance	32 m
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall, Suspended ceiling
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Nominal flux (lm)	100
Polar curve image	YES
Power consumption AC (VA)	6.5
Power consumption DC (mA / W)	14 / 3.1
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ALUMINIUM – PC
Operating temperature (°C)	-10 to +40



## PRODUCT ACCESSORIES



LA18051  
MULTYLUX Recessed  
Frame



LA18052  
MULTYLUX Wiring  
Suspension 0.5m Set



LA18053  
MULTYLUX Wiring  
Suspension 1m Set

