


MULTYLUX C 32m NRG WL/CL Exit Sign and Safety Luminaire

Part No. L18155

Categories: NRG Exit Signs, NRG Exit Signs, NRG+ CPS, NRG+ LPS

Tag: MULTYLUX WL/CL



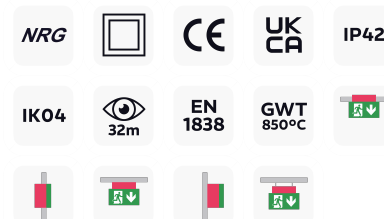

Exit sign and safety luminaire combined, with downlight element to illuminate in accordance with the EN 1838 requirement for 5 lx illuminance on safety devices, suitable for mounting on walls, ceilings and recessed.

TECHNICAL SPECIFICATION

Weight	1.15 kg
System	NRG
Insulation class	II
Compliance	CE, UKCA
IP rating	IP42
IK rating	IK04
Viewing distance	32 m
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting exit sign	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall, Suspended ceiling
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Nominal flux (lm)	100
Polar curve image	YES
Power consumption AC (VA)	6.5
Power consumption DC (mA / W)	14 / 3.1
Colour temperature (°K)	5700
Service life L80B20	50000
Colour	RAL 9003
Material	ALUMINIUM – PC
Operating temperature (°C)	-10 to +40



PRODUCT ACCESSORIES



LA18051
MULTYLUX Recessed
Frame



LA18052
MULTYLUX Wiring
Suspension 0.5m Set



LA18053
MULTYLUX Wiring
Suspension 1m Set

