


NRG BUS CU DALI Emergency Lighting Control Unit

Part No. CU20001

Categories: Control Systems, NRG BUS

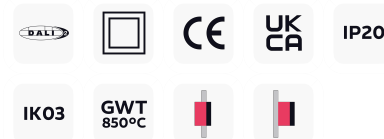


- 7" colour touchscreen
- Permanent display of system status
- 128 devices across two DALI networks
- Long-life CR2032 battery
- Recessed housing is available with a surface mount on request
- Ethernet CAT 5e RJ45 interface
- Monitor locally and remotely via NRG Cloud
- View, download, store and print logs and testing data
- Compatible with any brand of registered or certified DALI products
- User-friendly application software
- NFC-capable devices allow for easy installation programming
- Range of powerful technician tools



TECHNICAL SPECIFICATION

Nominal input voltage (V)	230 V 50/60 Hz
System	NRG BUS DALI 2
Insulation class	II
Compliance	CE, UKCA
IP rating	IP20
IK rating	IK03
Glow wire test	850 °C – 30s
Mounting system	Recessed wall, Surface wall
Power consumption AC (W)	Max. 10
Max. DALI cable length	1 mm ² cable – 200 m – 1.5 mm ² cable – 300 m
Max. device connections	128 (2 x 64 DALI Device)
Colour	RAL 9016
Material	PC
Operating temperature (°C)	0 to +40



PRODUCT ACCESSORIES



LA18050
NRG Control Unit Wall
Mounting Box