


# WAYLUX Wall IP66 B NRG BUS W 3H Safety Luminaire

Part No. L20027

Categories: Luminaires, NRG BUS

Tag: WAYLUX WALL IP66

**exilux**

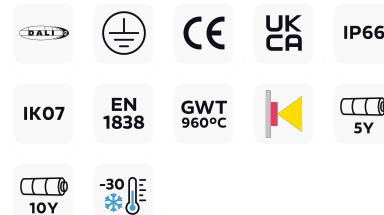

Safety wall luminaire IP66-rated for lighting escape routes, both indoors and outdoors.

## TECHNICAL SPECIFICATION

Weight	1.7 kg
Nominal input voltage (V)	230 V 50/60 Hz
System	NRG BUS DALI 2
Insulation class	I
Compliance	CE, UKCA
IP rating	IP66
IK rating	IK07
EN 1838	EN 1838
Glow wire test	960 °C – 30s
Mounting luminaire	Surface wall
Warranty	5 Years, 10 Years
Environments	Cold
Emergency duration (h)	3
Battery	LiFePO4 6.4 V 3.2 Ah
Nominal flux (lm)	550
Polar curve image	YES
Power consumption AC (W)	Max. 11.6
Charging times (h)	24
Mode of operation	Maintained, Non-maintained
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9005
Operating temperature (°C)	-30 to +45

