


# EVOLUX NRG+ 4W WL/CL Safety Luminaire

Part No. L18144

Categories: NRG+ CPS, NRG+ LPS, NRG+ Luminaires, NRG+ Luminaires



Tag: EVOLUX 4W WL/CL

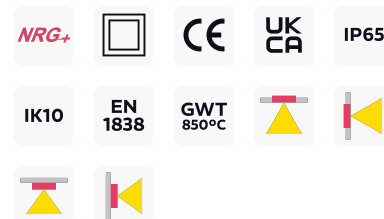

Safety luminaire with an IP65 rating, suitable for mounting on walls, ceilings and recessed.

## TECHNICAL SPECIFICATION

Weight	0.52 kg
System	NRG+
Insulation class	II
Compliance	CE, UKCA
IP rating	IP65
IK rating	IK10
Nominal input voltage (V)	230 V 50/60 Hz – 220 V DC +25/-20 %
Nominal flux (lm)	640
EN 1838	EN 1838
Glow wire test	850 °C – 30s
Mounting luminaire	Recessed ceiling, Recessed wall, Surface ceiling, Surface wall
Polar curve image	YES
Power consumption AC (VA)	9
Power consumption DC (mA / W)	20 / 4.3
Colour temperature (°K)	5000
Service life L80B20	50000
Colour	RAL 9003
Material	PC
Operating temperature (°C)	-10 to +40

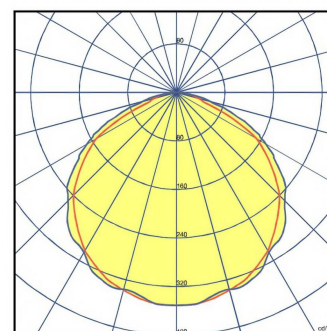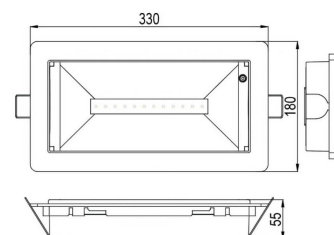

## PRODUCT ACCESSORIES



LA18047  
EVOLUX Full Recessed  
Set (included in delivery)



LA18046  
EVOLUX Semi-Recessed  
Set